

Clement

CARVING 600X1200MM

Discover Artisanal Mastery That Transcends Traditional Charm.





Renite is a name that resonates with artistic vision and innovative perfection. We are a leading manufacturer of ceramic tiles based in Morbi, Gujarat, India with a grand production capacity of 82,50,000 sq. meters annually.

Since our advent in 2009, we have been making our mark in the ceramic industry with the exclusive designs and the outstanding quality of our products. The technical and aesthetic characteristics of our tiles make them the ideal solution for all indoor and outdoor places.

Our tiles combine beauty and functionality to perfection. We strive to provide our customers with unique and inspiring environments through the production of our ceramic creations.

Group of Companies



15+ Years
of Tiles
Industry
Experience

500+

Dealers Network

8M

Sq.m/Year Production
Capacity


30+

Export Countries

130k

Sq.m Land Area

Company Strength

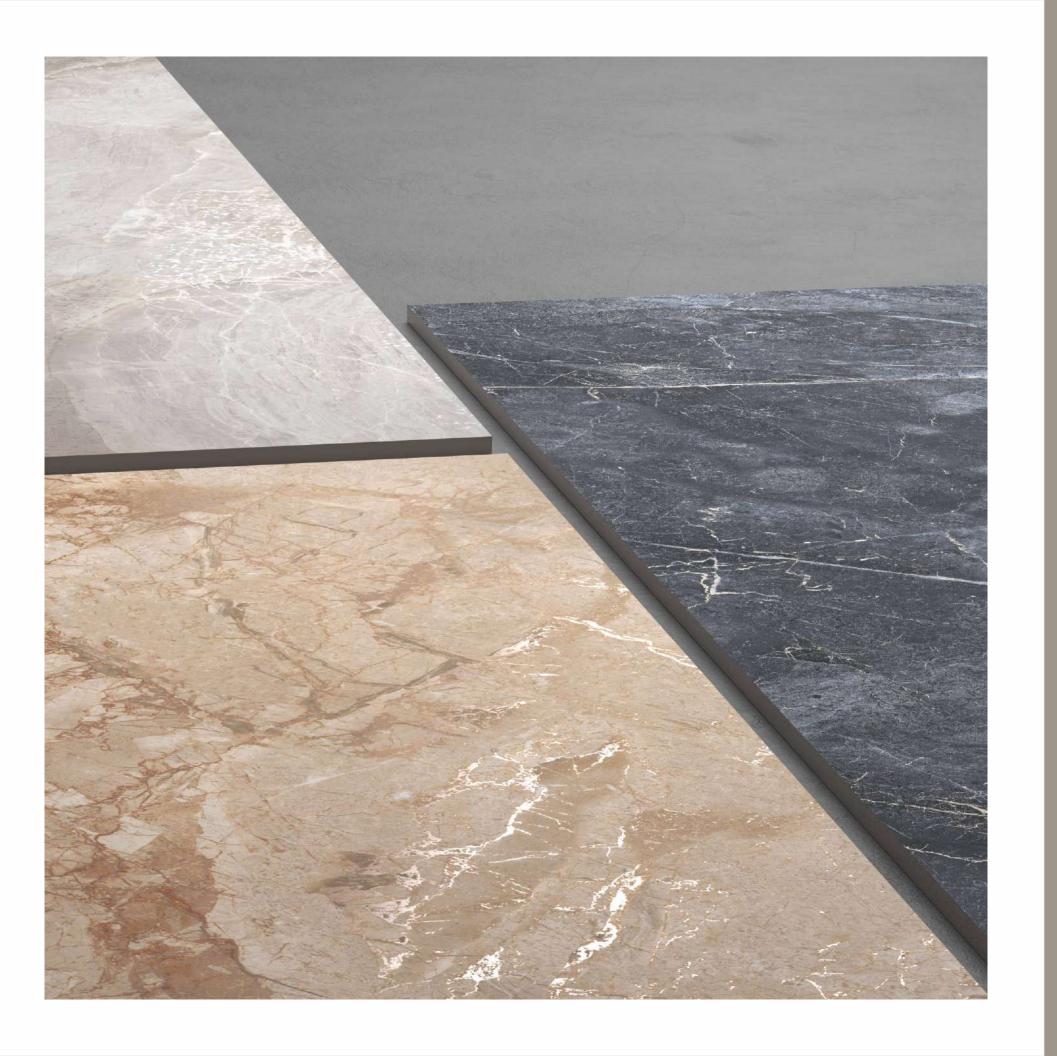

Dimensions

600x 1200mm


CarvingSurface

8.5mmThickness

Experience the enchanting and intricate magical carving that adorns the surface, creating a mesmerizing and all-encompassing design. These large surfaces measure 600x1200mm and offer a truly innovative and unique approach to interior design.

Advantages & Features Easy Installation Resistant To Salts Easy To Keep Clean Scratch Resistant Easy To Replace Resistant To Thermal Shock Resistant To Acid & Chemicals **Eco Friendly**


Versatile Applicability

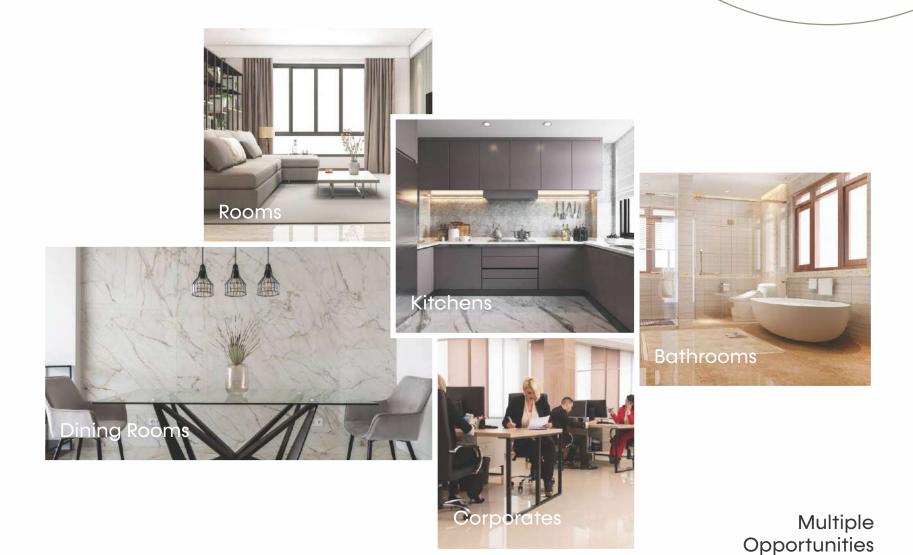





600x | Carving | Surface

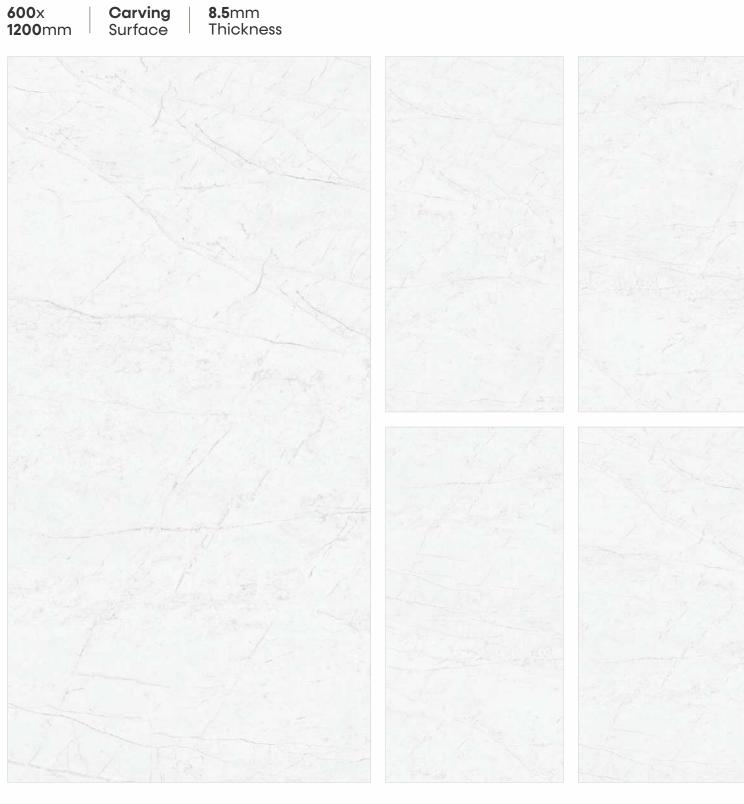







RENITE
REVOLUTIONIZING SPACES



600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness























600x Carving Surface

8.5mm Thickness

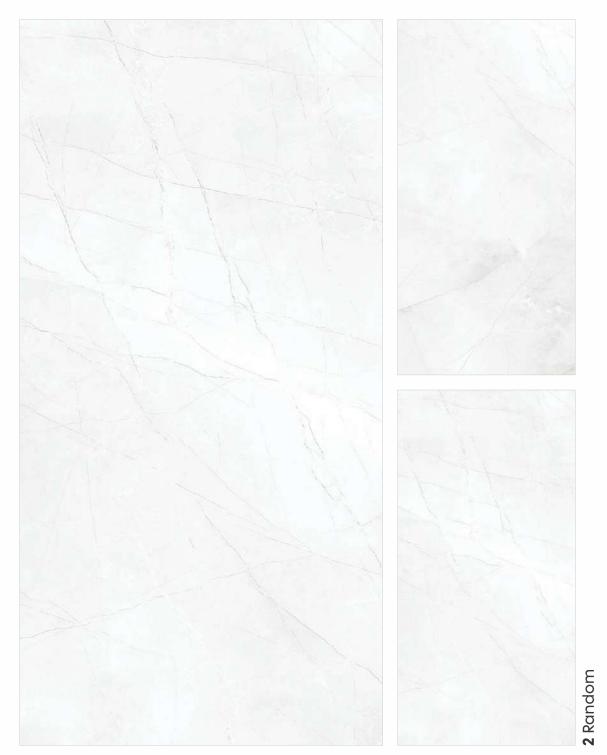

600x Carving Surface **8.5**mm Thickness

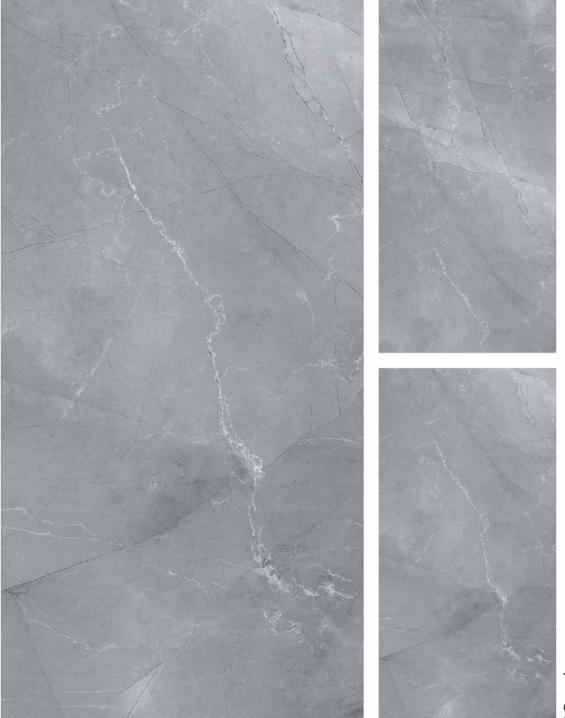































600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness


















600x | Carving | 8.5mm 1200mm | Surface | Thickness

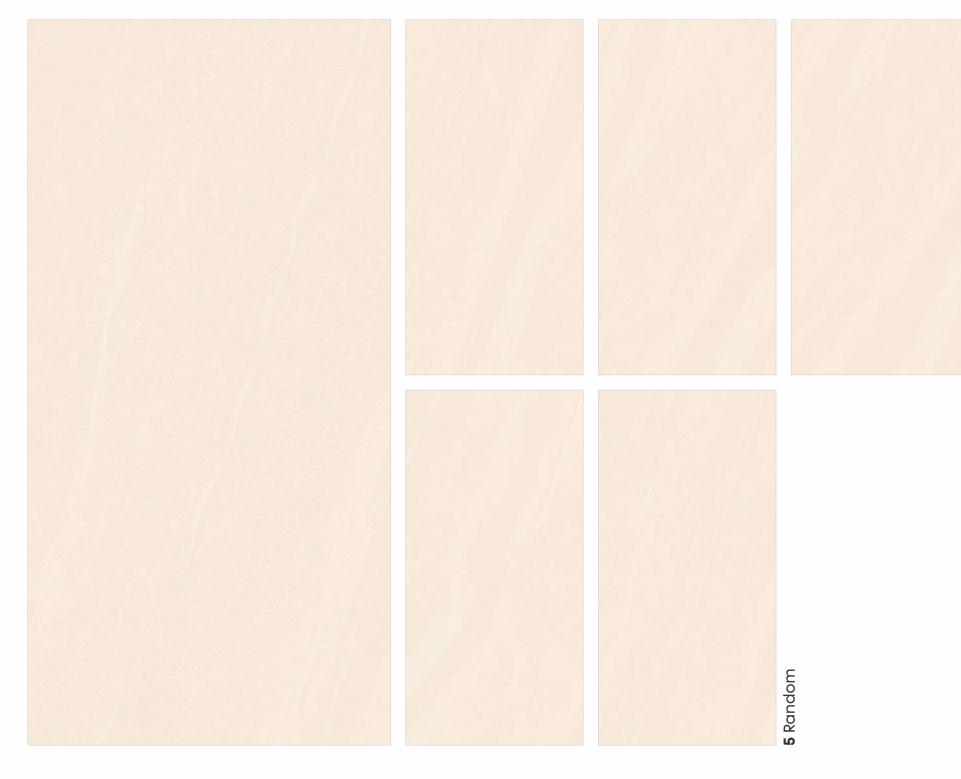












600x Carving Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness

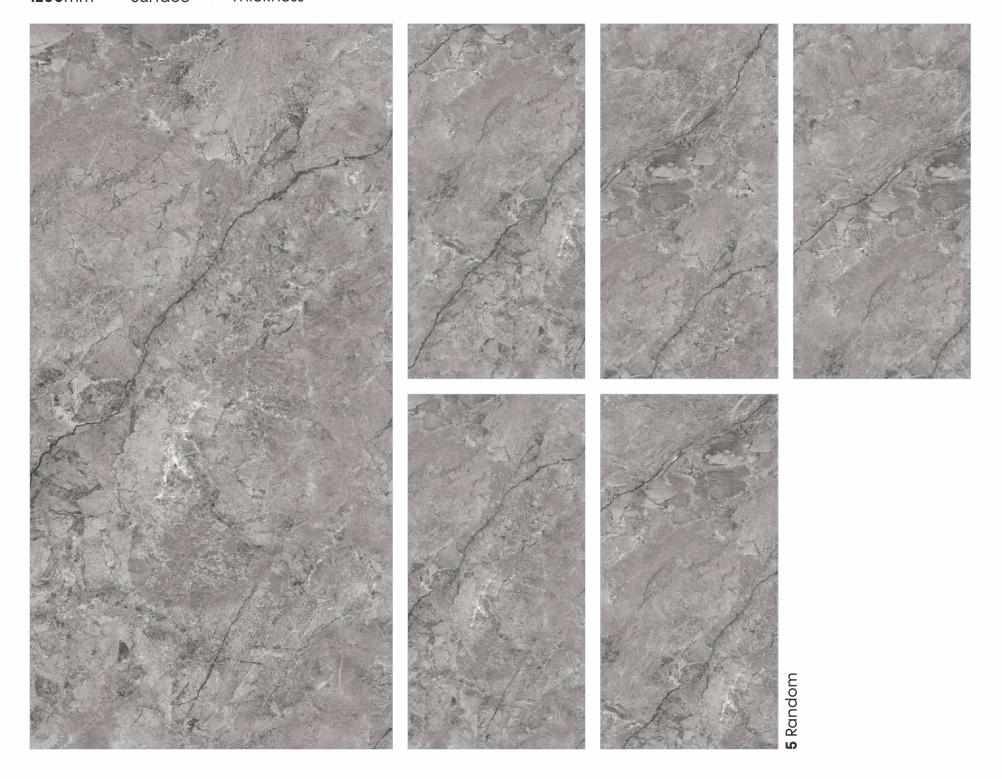









600x Carving Surface **8.5**mm Thickness

600x 1200mm | Carving | 8.5mm Surface | Thickness

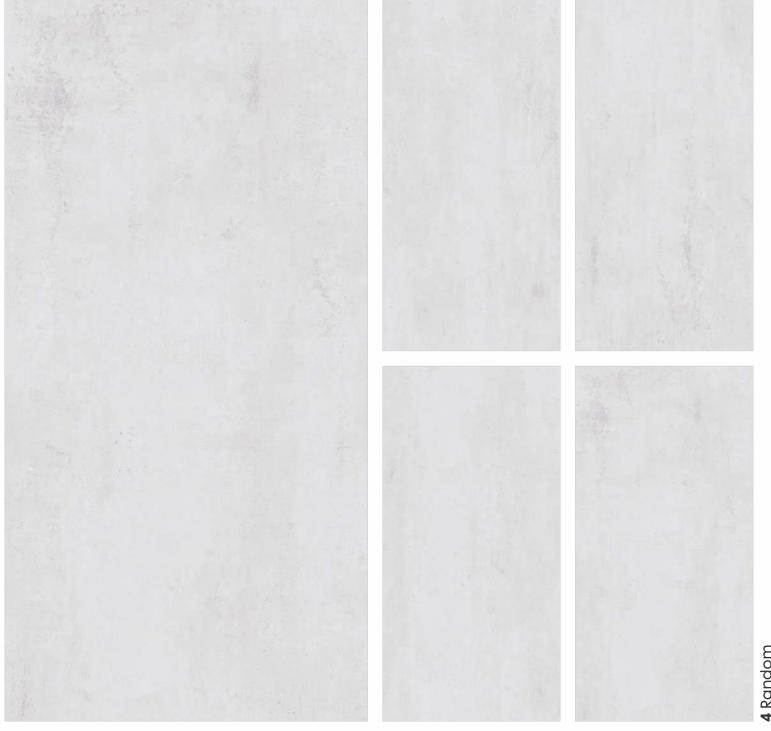





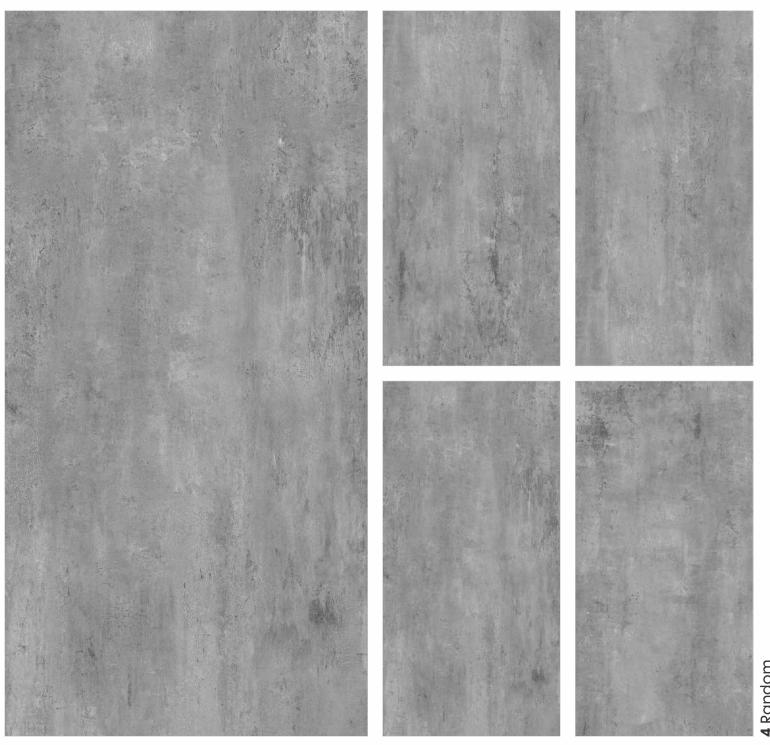











600x Carving Surface

8.5mm Thickness

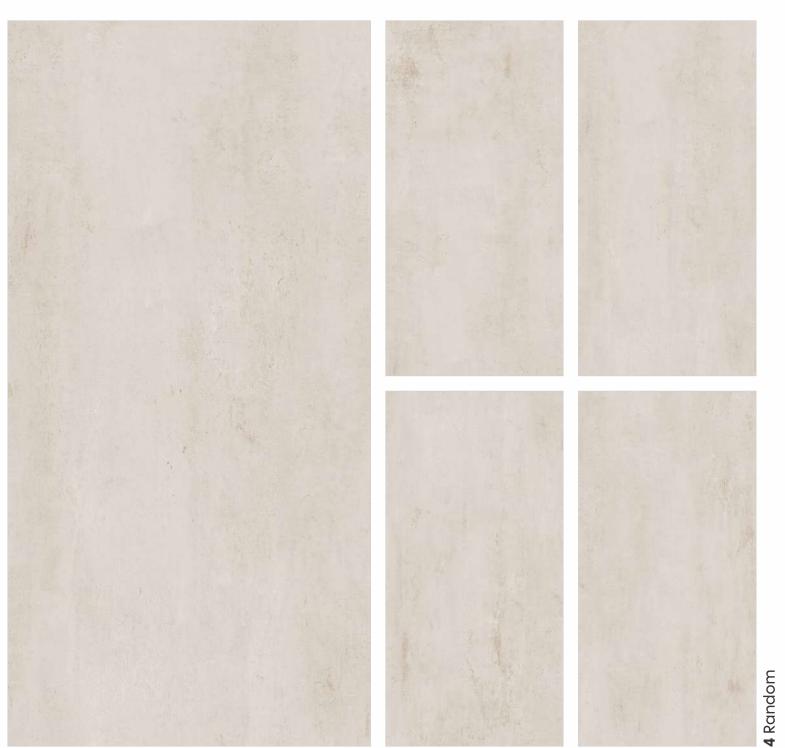

600x Carving Surface **8.5**mm Thickness

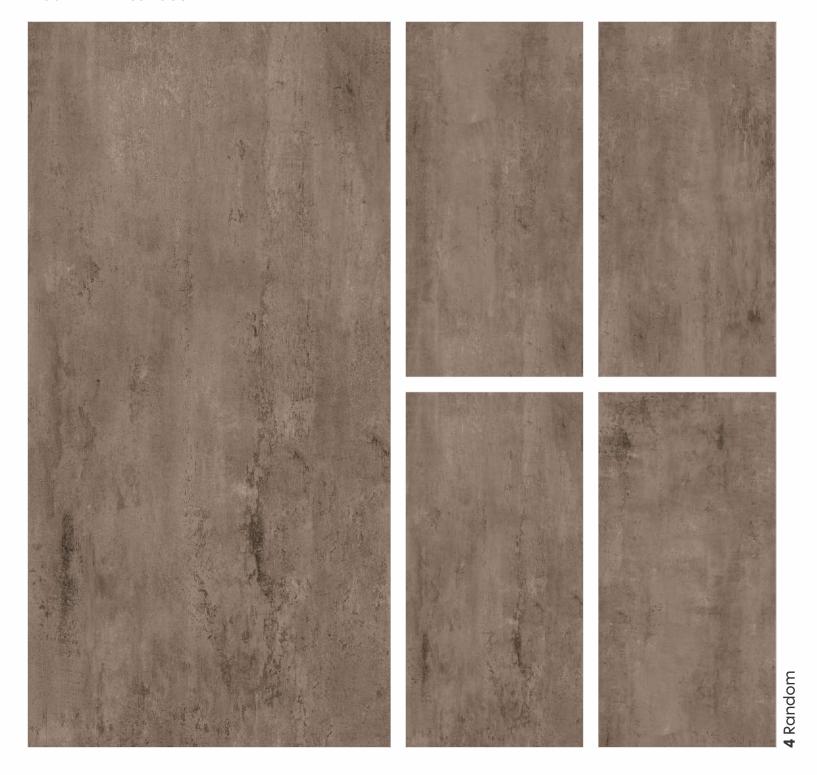













600x Carving Surface

8.5mm Thickness

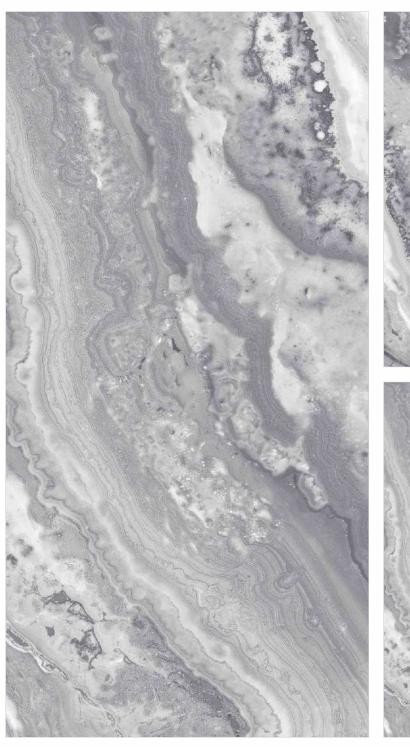

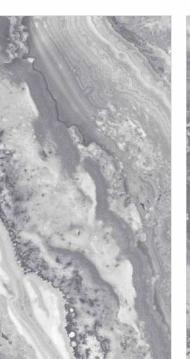










600x | Carving | 8.5mm 1200mm | Surface | Thickness

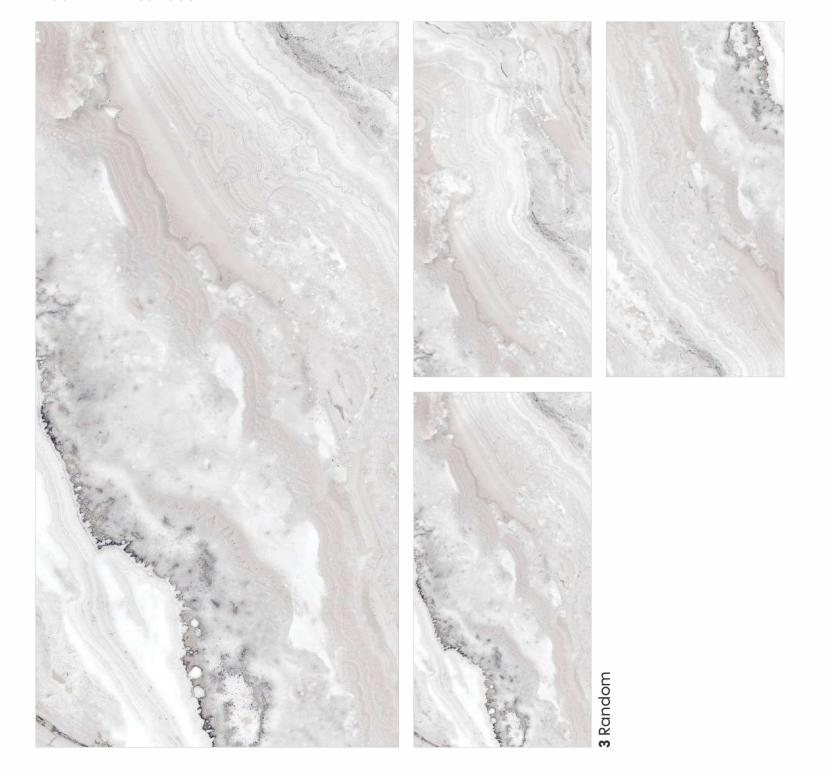

600x | Carving | 8.5mm 1200mm | Surface | Thickness





77263 LT



77263 DK



600x | Carving | 8.5mm 1200mm | Surface | Thickness







77274 DK HL




600x 1200mm Carving Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness

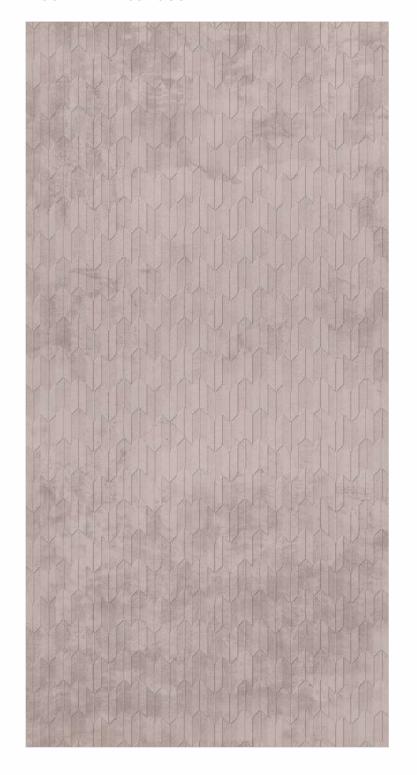




77274 LT HL



600x 1200mm Carving Surface

Carving 8.5mm Surface Thickness




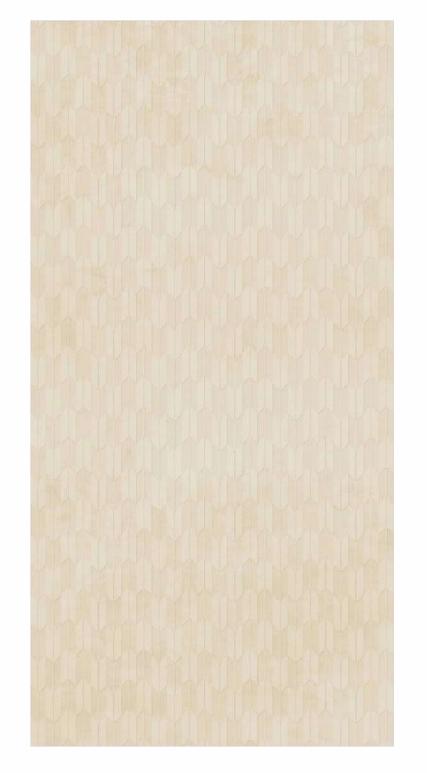



77279 DK



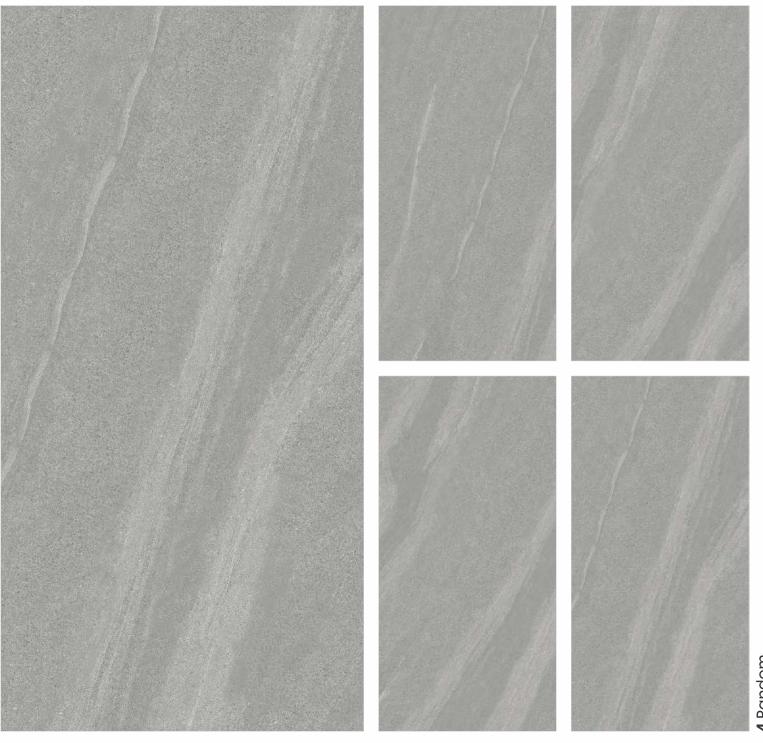





77280 DK



600x Carving Surface

8.5mm Thickness

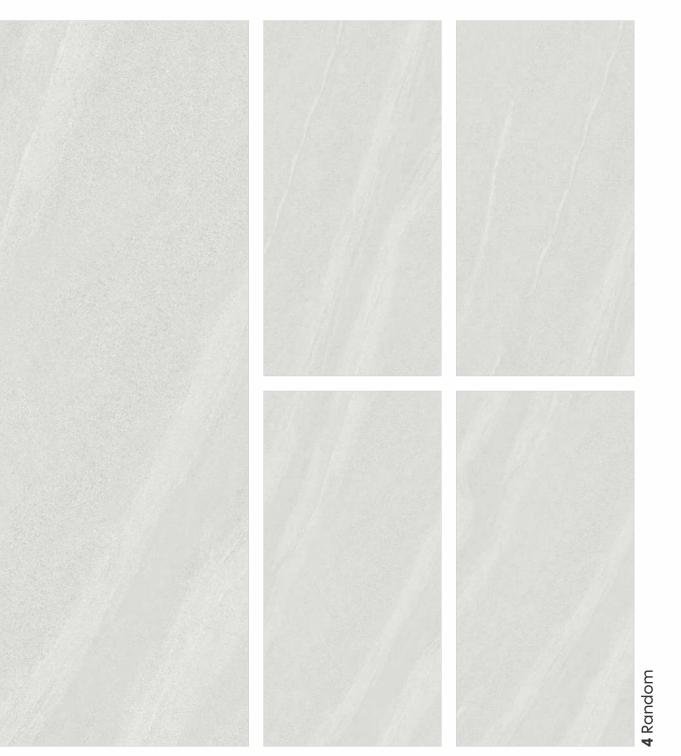

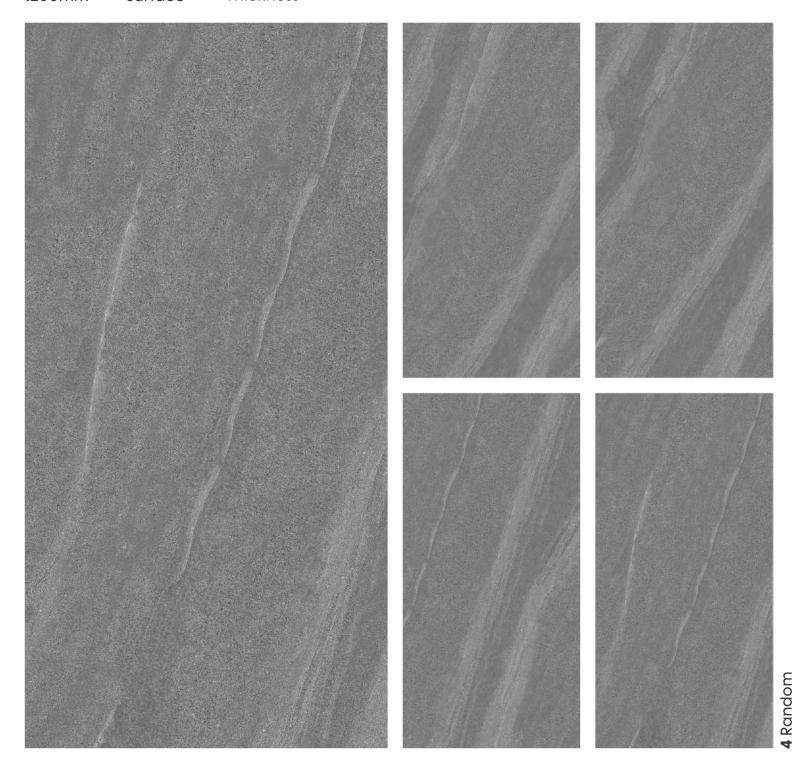




























600x Carving Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness

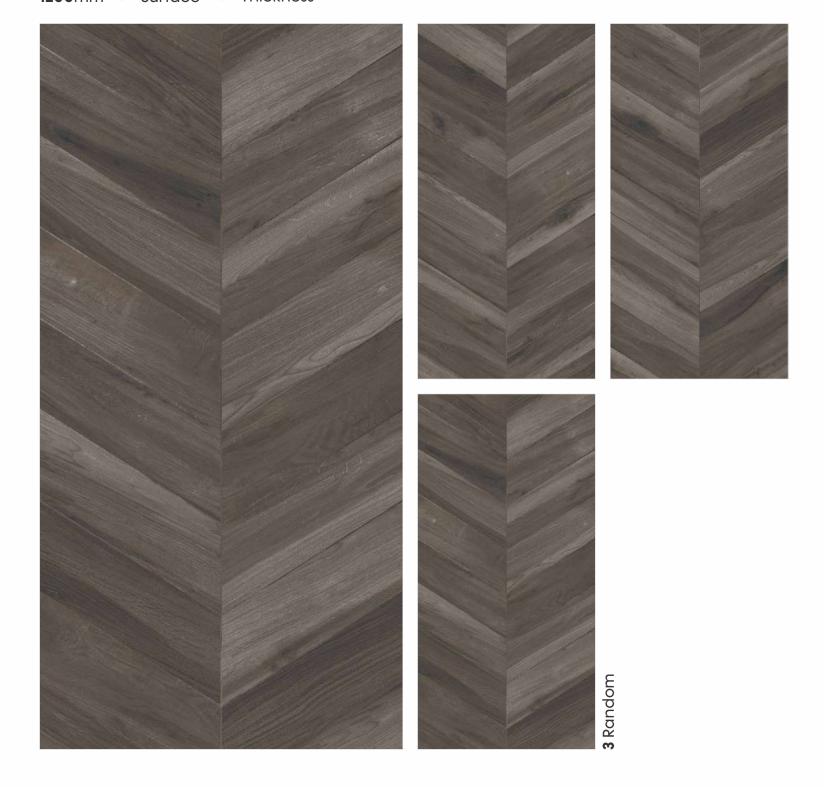





77302 LT



600x Carving 1200mm Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness












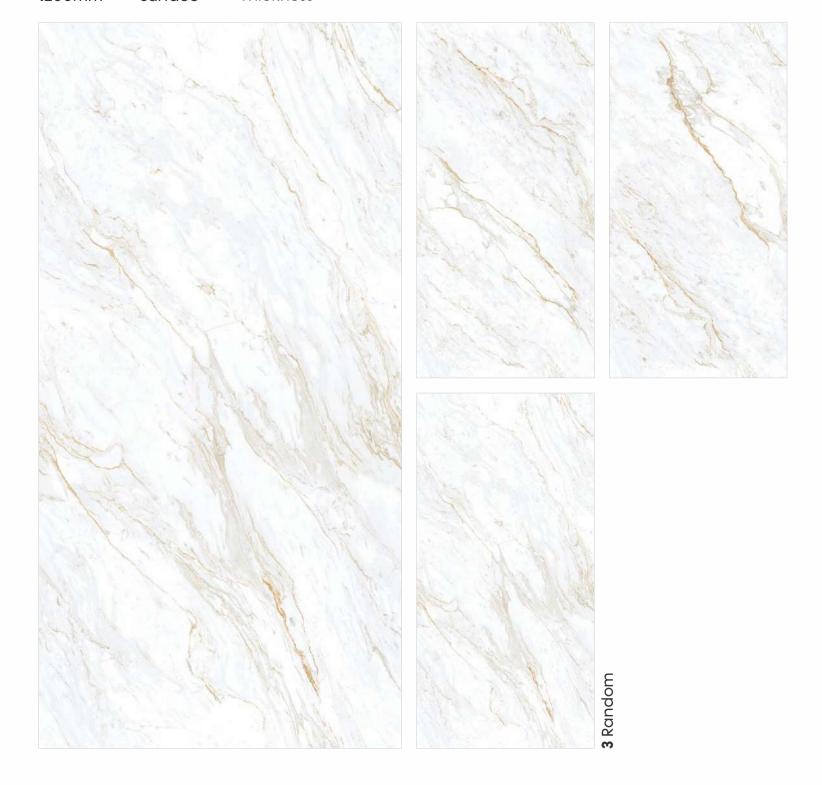









77305 (33696)









600x | Carving | 8.5mm | Thickness












600x 1200mm Carving Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness

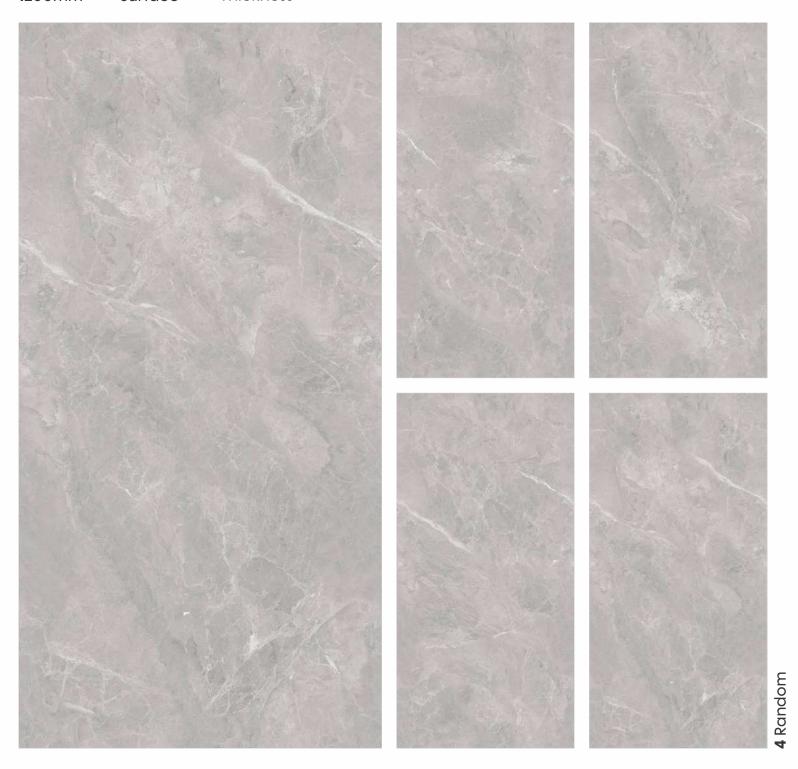










600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness

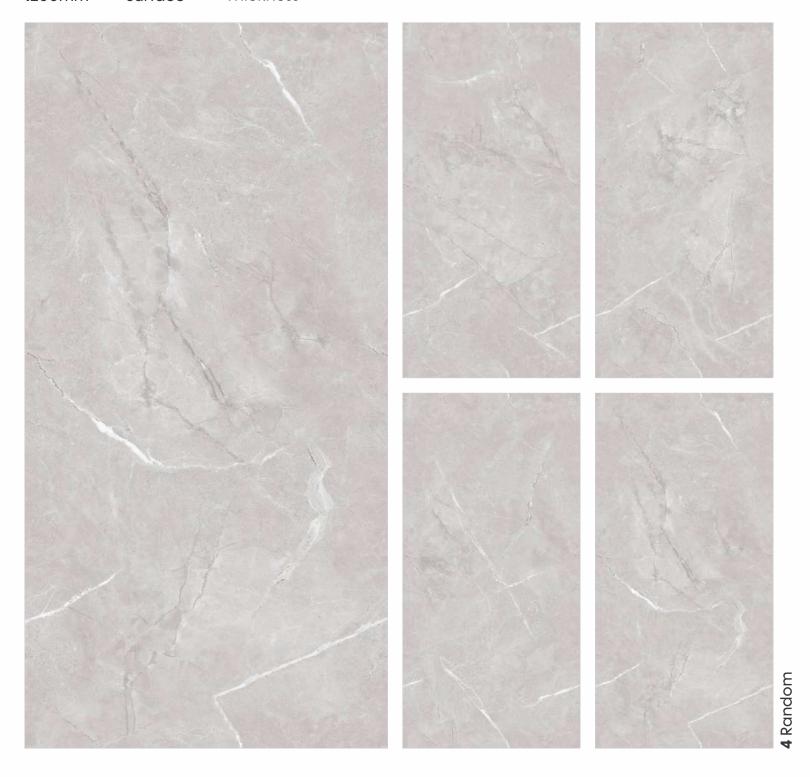










600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness

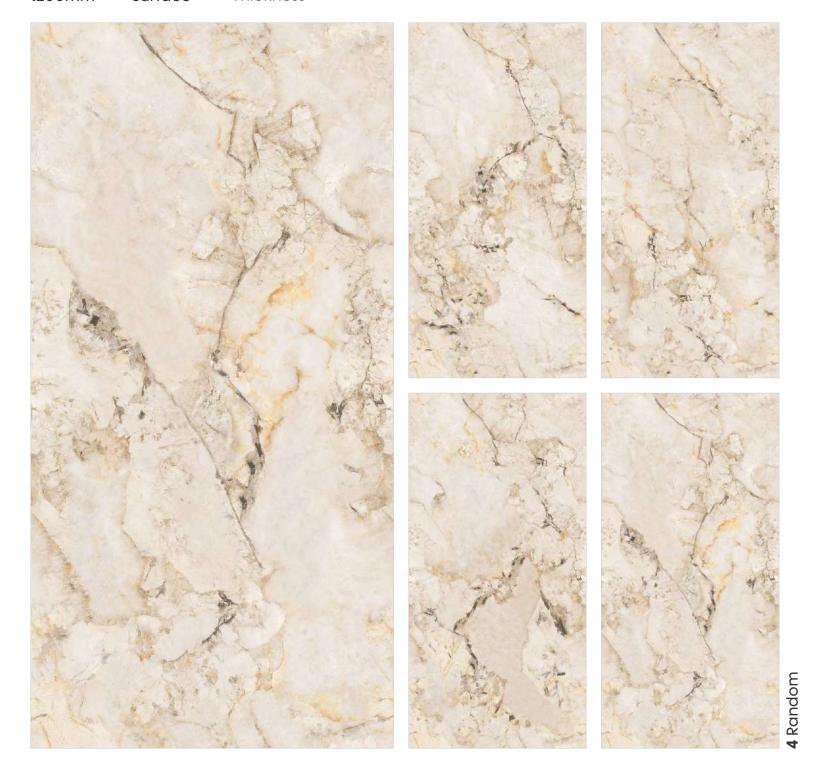








600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness

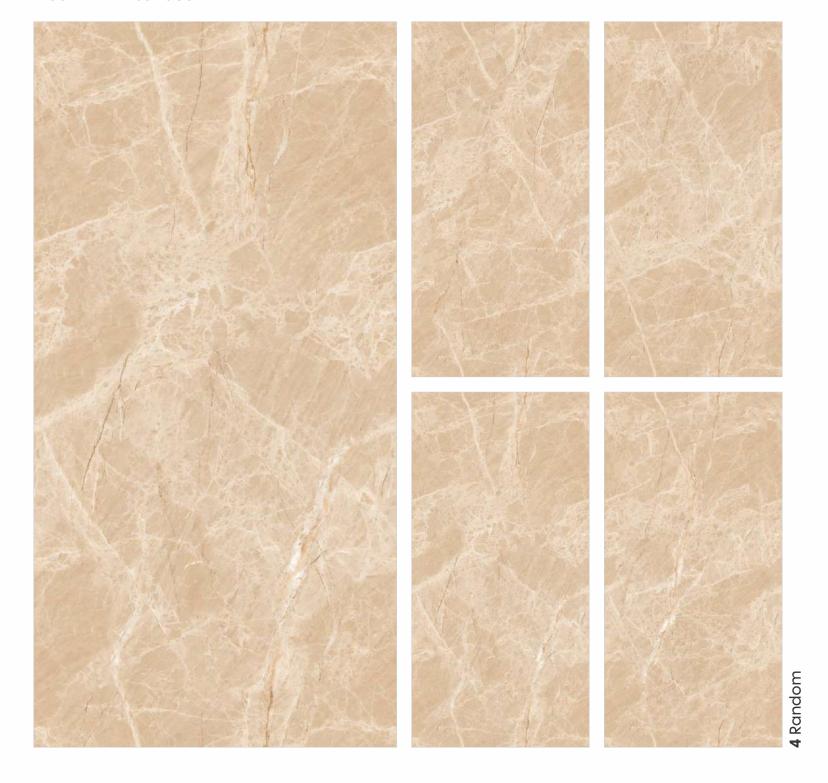









600x Carving 1200mm Surface

8.5mm Thickness

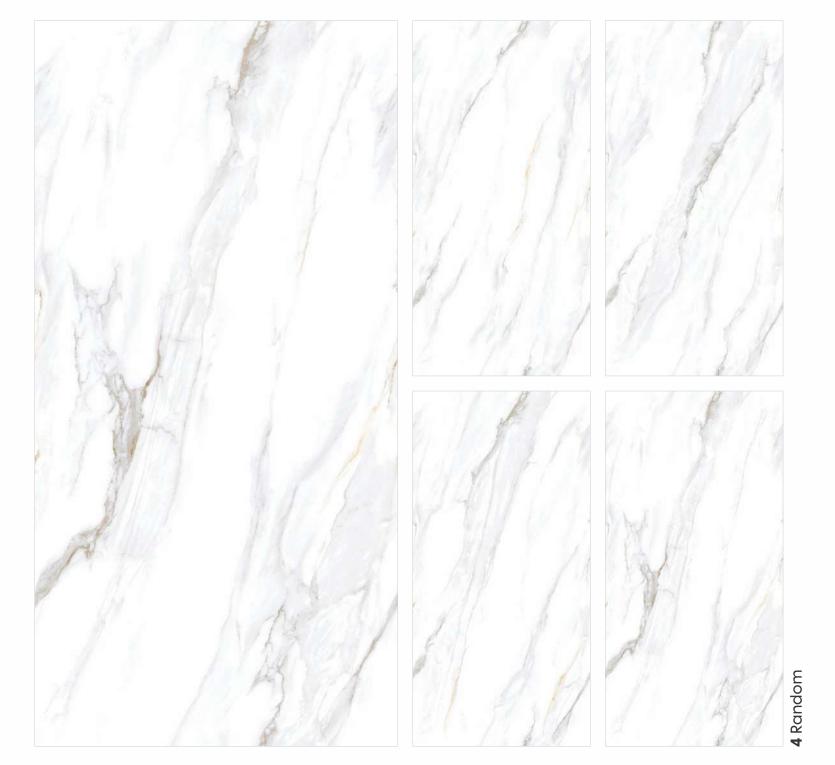

600x 1200mm Carving Surface **8.5**mm Thickness

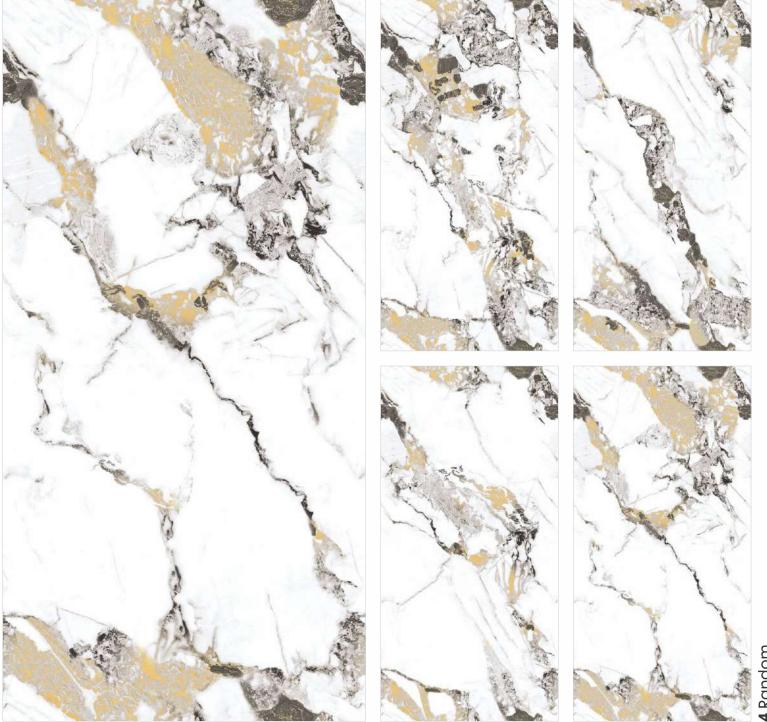















600x | Carving | 8.5mm 1200mm | Surface | Thickness









600x 1200mm Carving Surface

8.5mm Thickness










600x 1200mm Carving Surface

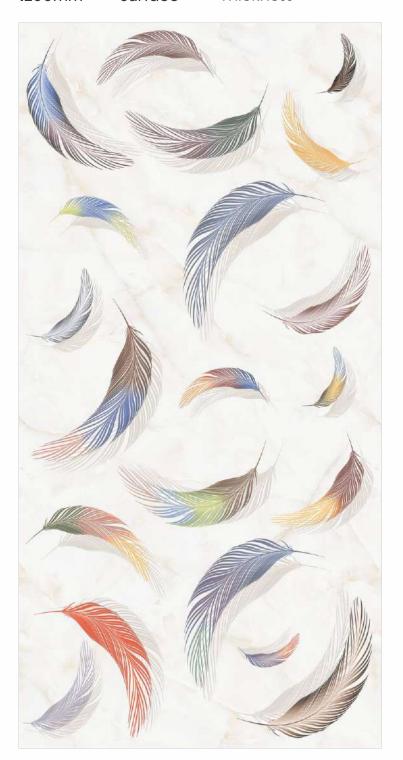



77329 DK




600x 1200mm Carving Surface

8.5mm Thickness



600x 1200mm Carving Surface **8.5**mm Thickness

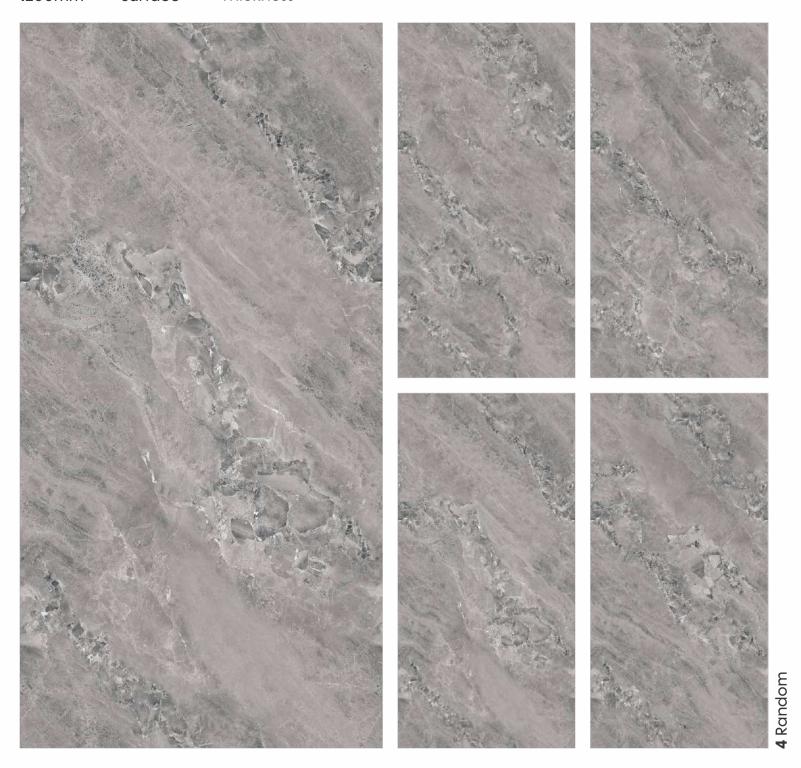












600x | Carving | 8.5mm | Thickness

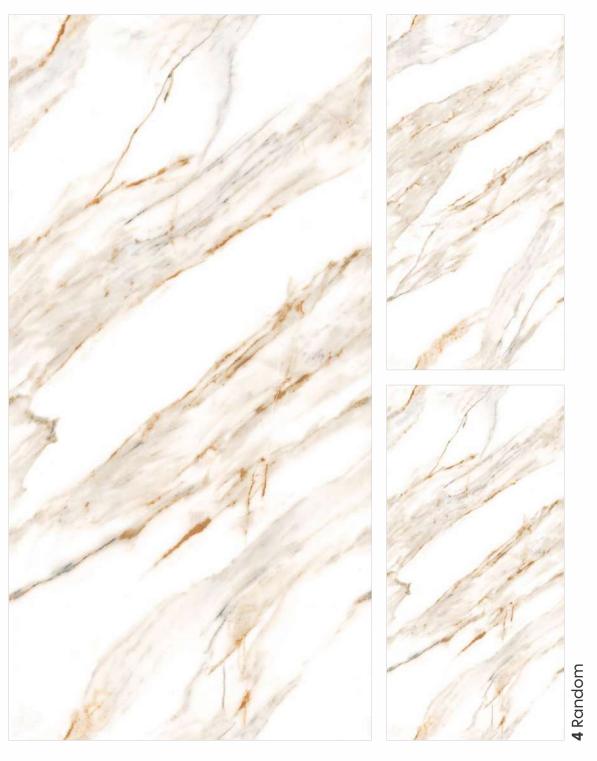







600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness









600x | Carving | 8.5mm 1200mm | Surface | Thickness



600x | Carving | 8.5mm 1200mm | Surface | Thickness





77334 DK



600x | Carving | 8.5mm 1200mm | Surface | Thickness











600x 1200mm Carving Surface

8.5mm Thickness



600x Carving Surface 8.5mm Thickness











600x | Carving | 8.5mm 1200mm | Surface | Thickness











600x | Carving | 8.5mm 1200mm | Surface | Thickness





77338 DK



600x | Carving | 8.5mm 1200mm | Surface | Thickness













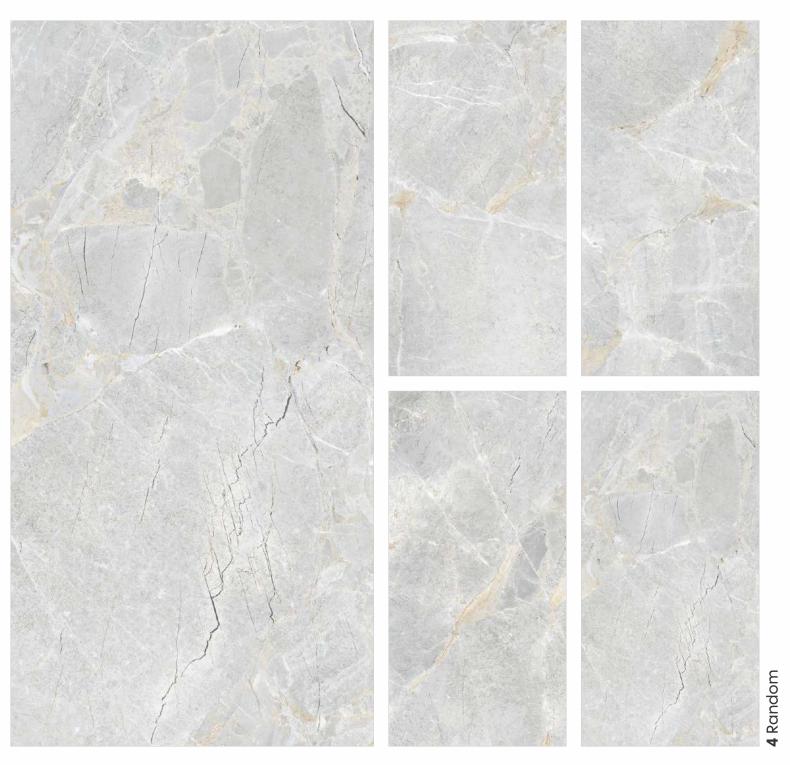

600x | Carving | 8.5mm 1200mm | Surface | Thickness

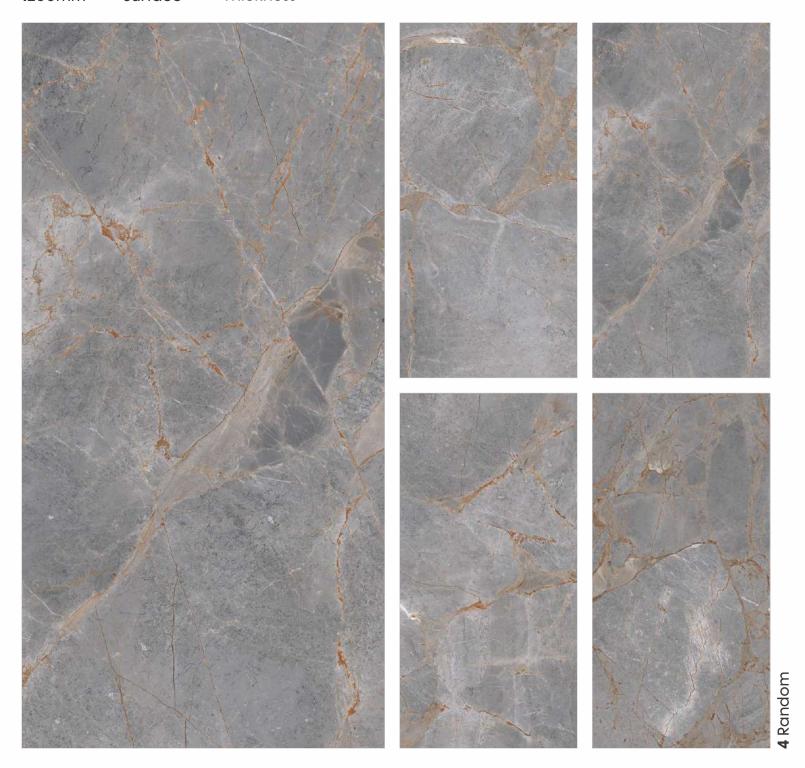








600x Carving Surface

8.5mm Thickness



600x Carving 1200mm Surface

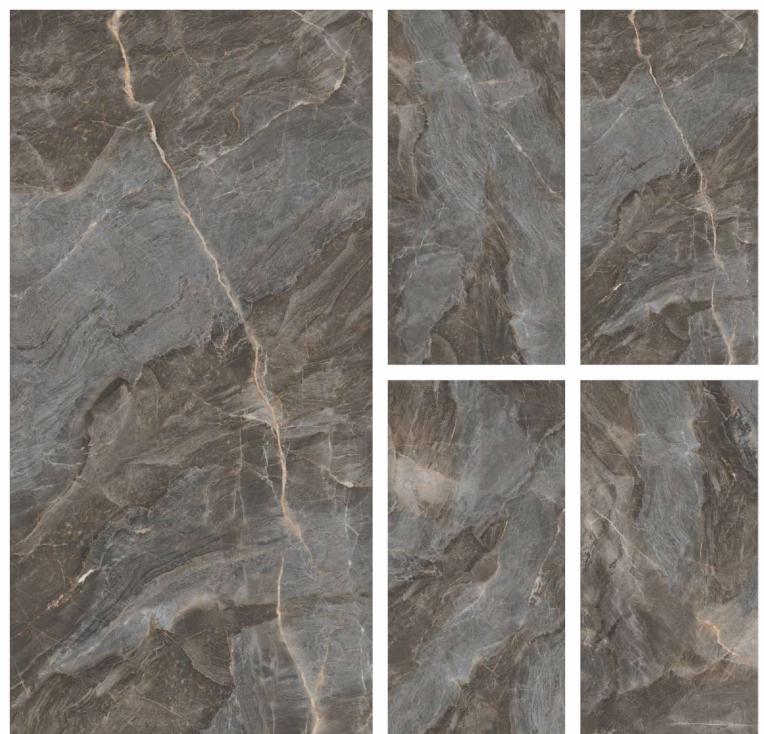

77342 (Athensh Grey)



77343 (Rizzoni)



600x **1200**mm

Carving Surface



600x | Carving | 8.5mm 1200mm | Surface | Thickness



Random








600x 1200mm Carving Surface

8.5mm Thickness



600x 1200mm Carving Surface

8.5mm Thickness

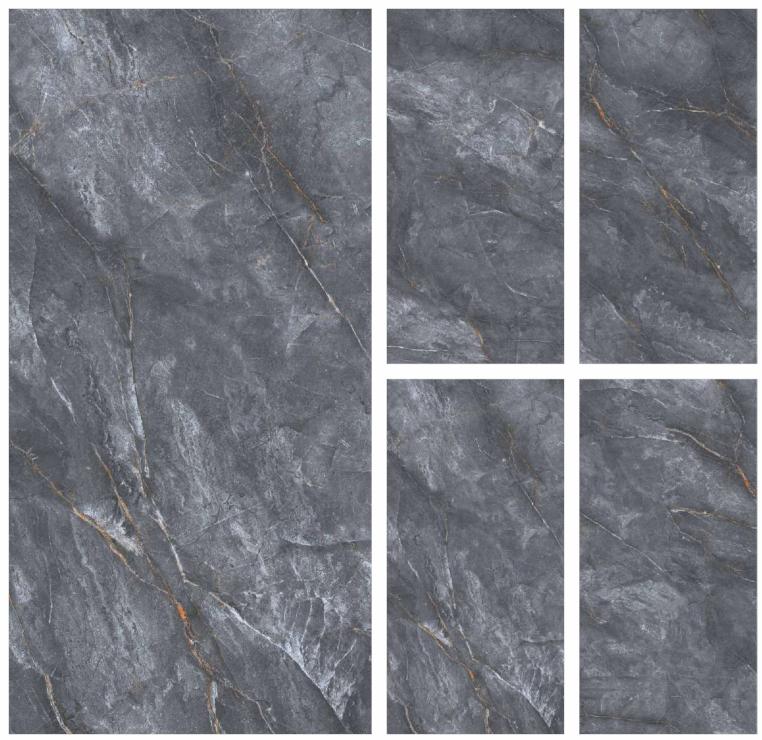









600x Carving Surface

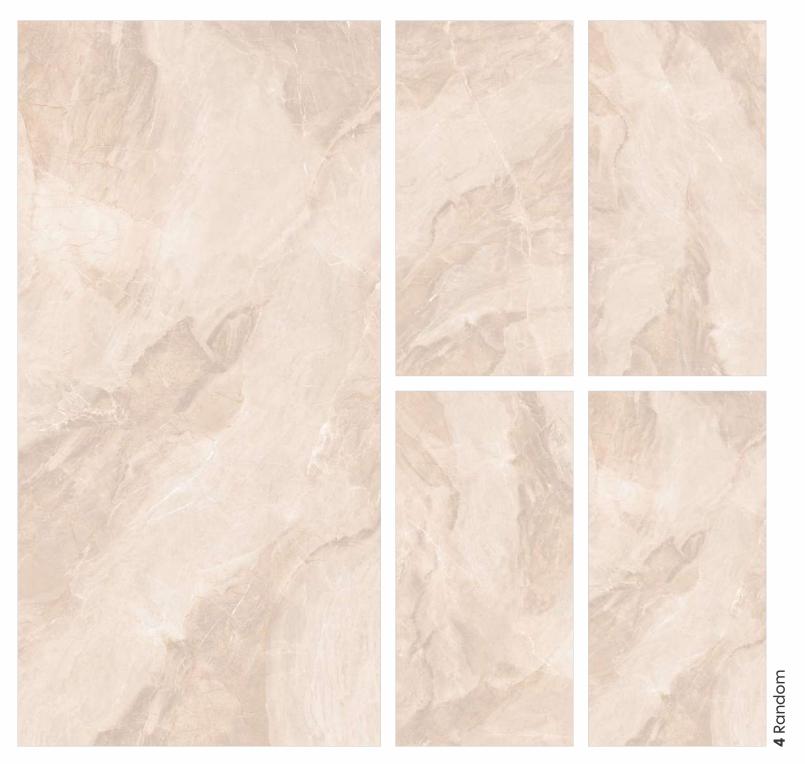

600x Carving 1200mm Surface **8.5**mm Thickness

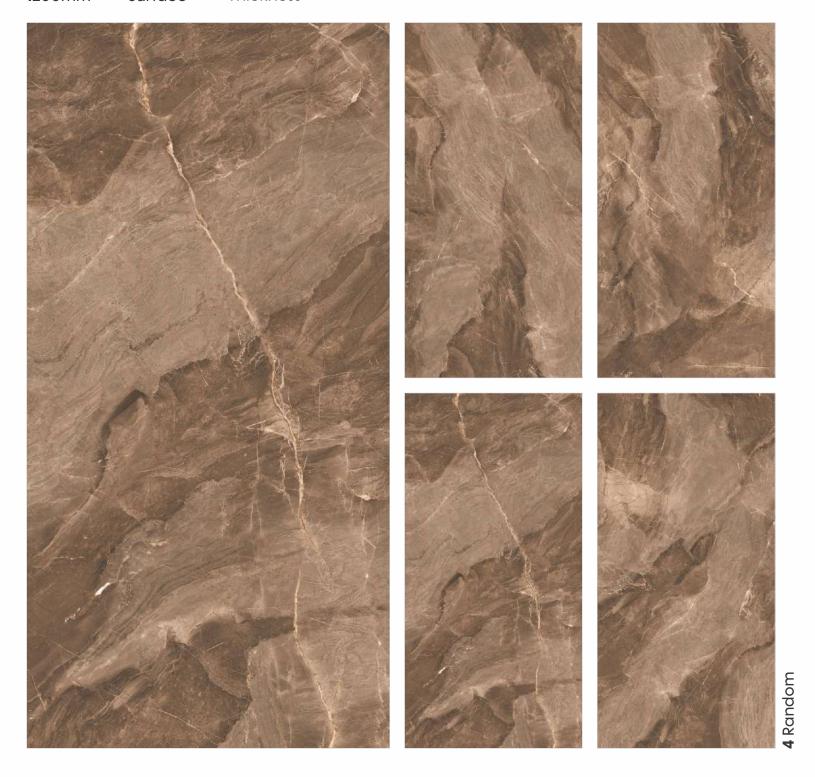





600x 1200mm Carving Surface









77347 DK



600x 1200mm Carving Surface

8.5mm Thickness



600x Carving Surface **8.5**mm Thickness










600x 1200mm Carving Surface

8.5mm Thickness



600x 1200mm Carving Surface **8.5**mm Thickness

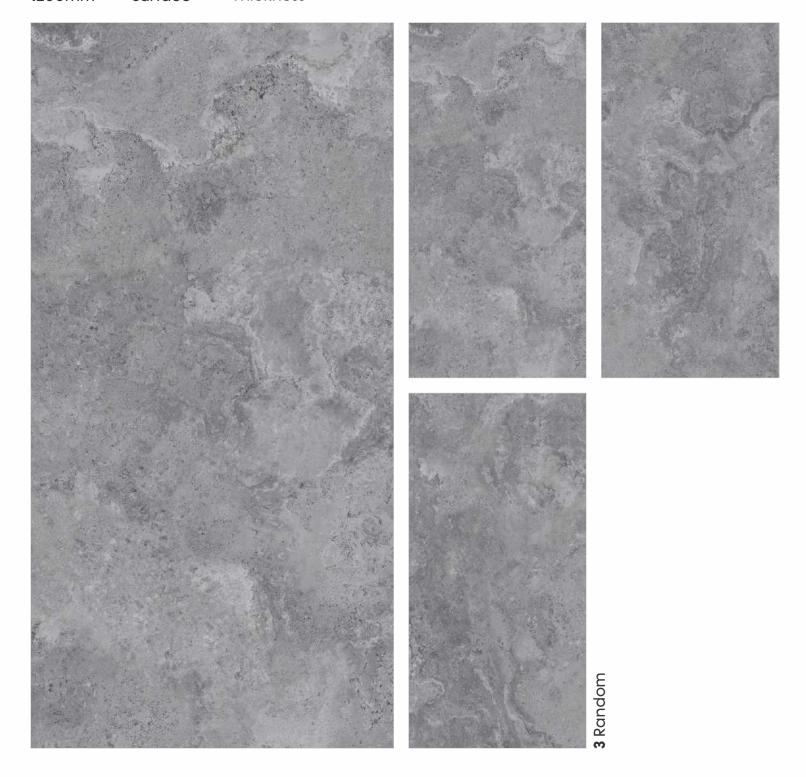



Cosmic Black




Cosmic White





600x | Carving | 8.5mm 1200mm | Surface | Thickness

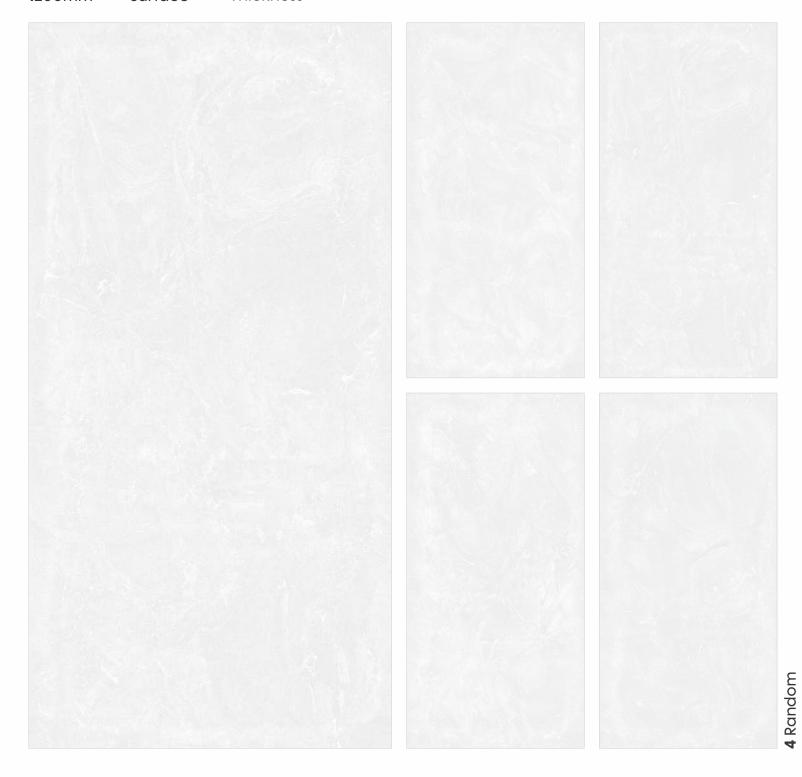

TECHNICAL SPECIFICATION

Property	International Std IS013006 : 2012 Group Bla	RENITE PGVT & GVT	Method of Testing
REGULATORY PROPERTIES			
Deviation in length & width	± 0.05%	± 0.10 %	ISO -10545-2
Deviation in thickness	± 5.00%	± 4.00 %	ISO - 10545-2
Straightness of sides	± 0.50%	± 0.06 %	ISO - 10545-2
Rectangularity	±0.50%	± 0.05 %	ISO - 10545-2
Surface flatness	±0.50%	± 0.10 %	ISO - 10545-2
Color difference	Unaltered	No change	ISO - 10545-16
Glossiness	As per mfg	Min 90	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water Absorption	< 0.50 %	< 0.10 %	ISO -10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO - 10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO - 10545-4
Impact Resistance	As per mfg	Min. 055	ISO - 10545-5
SURFACE MECHANICAL PROPERTIES			
Surface Abrasion Resistance	As per mfg	Min. Class-3	ISO - 10545-7
MOH's Hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO -10545-12
MOH's Hardness	No damage	No damage	ISO - 10545-9
Moisture expansion	Nil	Nil	ISO - 10545-10
Thermal expansion (COE)	Max. 9.0 X 10.6	Max. 6.5 X 10	ISO - 10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO -10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO -10545-13
Satin resistance	Resistan	Resistant	ISO - 10545-11
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO - 10545-13
Fire resistance	As per mfg	Fireproof	N.A.
Lead & Cadmium given off by glazed tiles	As per mfg	Dous not yield Pb & Cd	ISO -10545-15

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



PACKING DETAILS

Product	Size	Thickness (approx)	No. Of Tiles Per Box	Coverage Area
PGVT	600x1200mm	8.5mm	2 Pos.	1.44 Sq. mtr.



Serve No. 76 Peki. 6, Sartanpar Road, Ratavirda, Morbi - 363 621, Gujarat, INDIA

Web. www.renitevitrified.com

Domestic

Email. marketing@renitevitrified.com **Mob**. +91 95121 40004

Expor

Email. export@renitevitrified.com Mob. +91 95121 40008